




Modèle		CET 1000	CET 2000
Capacité (t)		1	2
Vitesse de déplacement (m/min)		20/5	20/6.7
Moteur du chariot (kW)		0.2/0.05	0.2/0.067
Rayon de courbe min. (m)		1	1.2
Classification FEM/ISO		2m/M5	2m/M5
Facteur de service %ED		20/10	20/10
Bride de poutre (mm)	Standard	74-140	74-140
	Option	141-200 / 201-310	141-200 / 201-310
A		132	132
A1		308	308
B		280	280
C		227	227
D		142	149
E		14	14
Diamètre de roue G		Φ68	Φ75
Poids net (kg)		23	26

ATTENTION : Les palans VSM (monophasés) ne sont pas compatibles avec les chariots électriques CET.

Compatibilité des palans électriques avec nos références de chariots porte-palans et griffes d'accrochage

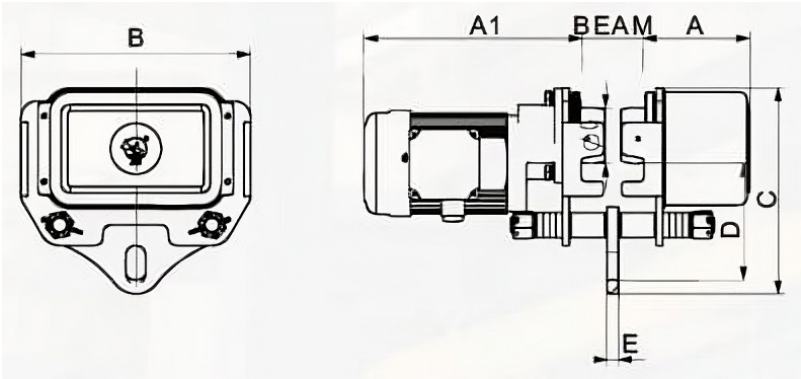

VST250 - VST500 - VST1000

+



CET1000 - CET2000



VST2000

+



CET2000



VST250 - VST500 - VST1000

+



BC10 - BC20 - BC30
BC50 - BC100



VST2000

+



BC20 - BC30
BC50 - BC100



VSM250 - VSM500 - VSM1000

+



BC10 - BC20 - BC30
BC50 - BC100

